

# Vertigo Steatite Wi-Fi



**Wi-Fi  
CONNECTIVITY (IP)**



## Comfort

- Fast heating thanks to double-tank structure
- Easy programming with quick mode selection
- Boost mode generates maximum heating for extra water needs
- Connectivity and remote control via the Cozytouch application



## Durability

- Double-tank Steatite technology: ceramic dry heating element protected by a sleeve for limited scaling and easy maintenance
- Double magnesium anode to bolster tank protection
- Diamond-quality glass lining
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around the flange



## Installation

- Easy installation with wall-mounting plates and drilling template
- Multi-position installation – vertical or horizontal position
- Space-saving with only 29cm depth

### Safe operation:

- IP 24 – full compliance with European standards for electrical safety and user protection

## ELECTRIC WATER HEATER

### Models 30 to 100

(Multi-position installation)



## Energy savings

- Eco+ self-learning mode to supply the right amount of hot water when needed
- Monitor water and electricity use with the Cozytouch application
- Absence mode: generates energy savings when away from home
- Accurate electronic thermostat for fully accurate temperature controls



## User-friendly

- Ergonomic digital interface with heating indicator, operating modes and smart functions



### 1 Wi-Fi connectivity

2 **Waterdrop LED indicator:** amount of hot water ready to use

3 **Absence mode:** anti-frost position (7 °C)

4 **Manual mode:** required hot water amount selection

5 **Eco+ mode:** automatic operation based on consumers' daily habits

6 **QR code** for easy pairing with Cozytouch

- 1 DIAMOND-QUALITY GLASS LINING** for extended life and increased reliability
- 2** High-density, 0% CFC polyurethane foam
- 3 MAGNESIUM ANODE X2** for protection against corrosion
- 4** Inlet diffuser
- 5** Optimised stainless steel outlet pipes
- 6 DIGITAL THERMOSTAT** for temperature control accuracy




Video:



**Steatite** x2 TECHNOLOGY

### Dry Steatite heating element



Adapted to aggressive, mineralised and desalinated water. Its protective enamel-coated steel sleeve facilitates maintenance, and there is never any need to drain the tank to replace it.

## Technical specifications


Model	Maximum power output: exit tank (W)	Power output: entry tank (W)	Voltage (V)	Total heat-up time $\Delta T=50^{\circ}\text{C}$	Heat-up time: exit tank	Energy consumption (kWh/24 h at $65^{\circ}\text{C}$ )	ErP energy class	Profile
30 <sup>(1)</sup>	1000	1000	220-240	1h27	0h44	0.28	A B	S
50 <sup>(2)</sup>	2250	1000	220-240	1h46	0h33	0.69	A B	M
80 <sup>(3)</sup>	2250	1000	220-240	2h52	0h53	1.01	A B	M
100 <sup>(4)</sup>	2250	1000	220-240	3h32	1h05	1.11	A B	M

## Installation dimensions (mm)


Model	Dimensions (mm)				Net weight (kg)
	H	A	B	C	
30 <sup>(1)</sup>	593	452	280	141	19.5
50 <sup>(2)</sup>	766	609	500	157	24.5
80 <sup>(3)</sup>	1090	973	700	117	32.5
100 <sup>(4)</sup>	1301	1184	800	117	37.5

(1) ErP capacity is 25 L (2) ErP capacity is 40 L (3) ErP capacity is 65 L (4) ErP capacity is 80 L

CE ENEC IP 24

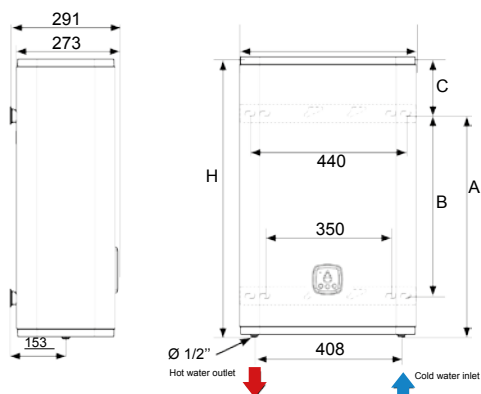

VERTICAL INSTALLATION

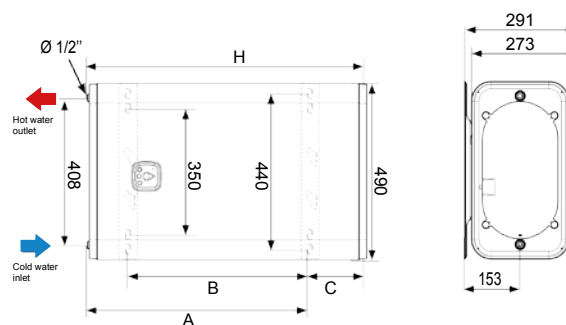

HORIZONTAL INSTALLATION

