

Steatite Cube



ELECTRIC WATER HEATER

Models 30 to 150
(Vertical wall-mounted)



Comfort

- Quick mode selection and temperature regulation thanks to front control knob



Durability

- Steatite technology: ceramic dry heating element adapted to aggressive, hard or desalinated water
- Magnesium anode to bolster tank protection
- Diamond-quality glass lining
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around the flange



Installation

- Easy installation with wall-mounting plates and drilling template

Safe operation:

- IP 24 - full compliance with European standards for electrical safety and user protection



Energy savings

- Absence mode with Anti-frost protection
- High efficiency water inlet
- CFC-free high-density insulation to increase energy savings




User-friendly

- Intuitive control panel with heating light indicator



- 1 Quick mode selection control knob
- 2 Absence mode (7°C)
- 3 Heating light indicator

- 1 **DIAMOND-QUALITY GLASS LINING** for extended life and increased reliability
- 2 High-density, 0% CFC polyurethane foam
- 3 **MAGNESIUM ANODE** for protection against corrosion
- 4 Inlet diffuser
- 5 Optimised stainless steel outlet pipe
- 6 **ELECTRONIC THERMOSTAT** for temperature control accuracy

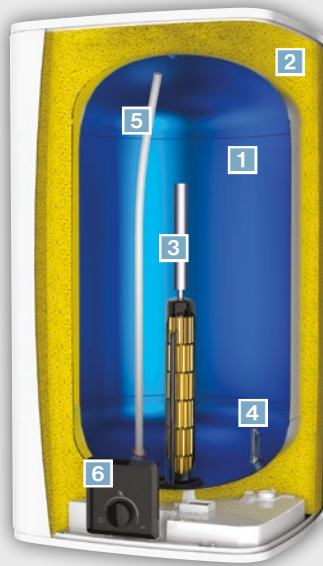


Video:



Steatite
TECHNOLOGY

Steatite dry heating element



Adapted to aggressive, mineralised and desalinated water. Its protective enamel-coated steel sleeve facilitates maintenance, and there is never any need to drain the tank to replace it.


Technical specifications

Model	Output (W)	Voltage (V)	Heat-up time at 60°C (Δt=20°C)	Heat-up time at 60°C (Δt=50°C)	Energy consumption (kWh/24 h at 65°C)	ErP energy class	Profile
30	1500	230	0h30	1h16	0.63	A++ B	S
50	1500	230	0h50	2h07	0.86	A++ C	M
75	1500	230	1h15	3h12	0.91	A++ C	M
100	1500	230	1h40	4h14	1.08	A++ C	L
150	1500	230	2h30	6h24	1.56	A++ C	M


Installation dimensions (mm)

Model	Dimensions (mm)								Flange opening (Ø) mm	Net weight (kg)
	A	B	C	D	E	F	G	H		
30	619	342	387	100	100	184	1/2"	189	78	14.5
50	904	342	387	100	100	184	1/2"	199	78	19.5
75	712	490	532	163	230	350/440	3/4"	82	78	27
100	883	490	532	163	230	350/440	3/4"	101	78	32
150	1203	490	532	163	230	350/440	3/4"	79	78	42

CE ENEC IP 24

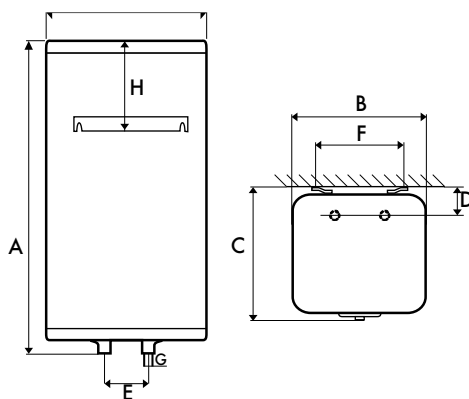

STEATITE CUBE 30, 50, 75 & 100

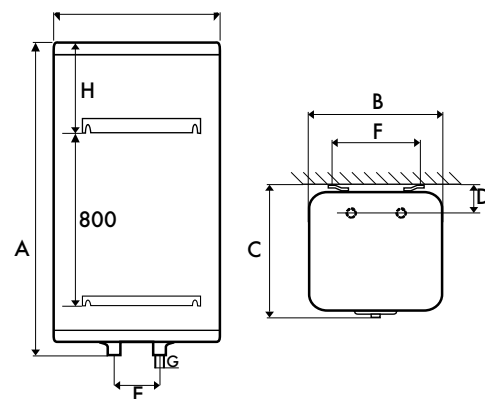

STEATITE CUBE 150

* Depending on models